

# CHALI® 長立牌® Strapping Systems

## 半自動PP帶捆包機

Semi-Automatic Strapping Machine



Extra Safe, Easy to Use and Maintain, Heavy-Duty Capacity

結構堅實耐用 操作簡易安全 抽插式電路設計 維修經濟容易

TÜV  
Rheinland

CE

EQA ICC ANSI-RAB  
QMS QUALITY

ISO 9001  
2000



## Semi-Automatic Strapping Machine


Extra Safe, Easy to Use and Maintain, Heavy-Duty Capacity

### 特點：


- 簡易操作設計：採單一開關，避免人為失誤。自動加溫，開機20秒即可作用，並配置15秒馬達自動停止裝置，降低機械磨耗及達到省電功能。
- 穩定耐用之電路設計：採用高低負載分流方式及抽插式電路設計，更換及維修容易。
- 捆包帶簡易調整寬度設計：採用專利 (NO-73634) 簡易調整帶寬之插帶槽及輔助帶槽，可使6-15mm捆包帶接合完整。
- 完美的裝備搭配：可選擇可掀式桌面，緊度在外調整，安全門開關，超小捆包物捆包等配備裝置。
- 桌面高度可調及活動輪可煞車：JN-600可調整桌面高度 (730-830mm)，並可配置可煞車活動輪。

### FEATURES:


- **Easy operation design:**  
Use unified switch to avoid faulted operation, system can automatically warm up to working temperature in 20 seconds. The motor shutdowns in 15 seconds of non-use and decreases consume of system and save energy.
- **Stable and durable circuitry design:**  
Utilized separated hi-volt & low-volt electricity loading design and plug-in circuit board to easier the maintenance.
- **Easy strap width adjustment design:**  
Equipped with patented (NO-73634) device of strap guides to seal strap 6-15mm in width perfectly.
- **Full range of optional devices:**  
Custom choices of devices such as lift type top cover, external adjustable tension knob, safety switch accesses on the top cover or door to shut down machine power when opening or tiny strapping assembly etc could completely meet various requirements.
- **Height-adjustable table and brake casters:(JN-600 ONLY)**  
Table height is adjustable between 730-830mm and the caster is brake type.

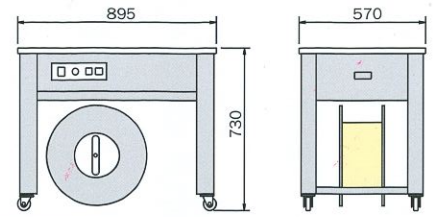


MODEL JN-600

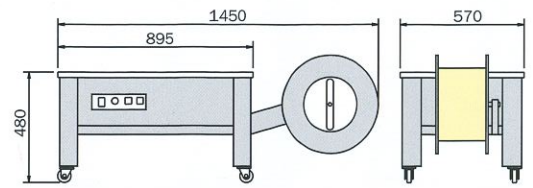


MODEL JN-600L

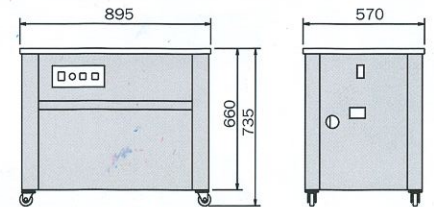

MODEL JN-740

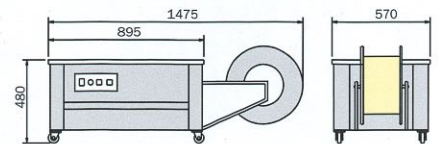

MODEL JN-740L

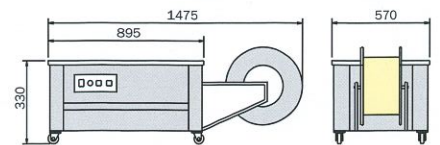

MODEL JN-740SL

### 機器規格 SPECIFICATIONS

| 機型     | MODEL             | JN-740, JN-740L & JN-740SL   | JN-600 & JN-600L   |
|--------|-------------------|--|--|
| 捆包速度   | Strap Speed       | 1.5 Sec./ Strap  | 1.5 Sec./ Strap  |
| 緊度     | Tension Strength  | 20~65kgs   | 20~65kgs   |
| 最小捆包尺寸 | Min. Package Size | 60mm   | 60mm   |
| 最大捆包尺寸 | Max. Package Size | Any Size   | Any Size   |
| 桌面高度   | Table Height      | 735mm(JN-740); 480mm(JN-740L)<br>330mm(JN-740SL)   | 730mm(JN-600); 480mm(JN-600L)                                    |
| 帶寬     | Strap Width       | 6~15mm   | 6~15mm   |
| 貼合方式   | Sealing Method    | Heat Sealing   | Heat Sealing   |
| 電源     | Power Supply      | 110/220V 50/60Hz 1Ph   | 110/220V 50/60Hz 1Ph   |
| 傳動馬達   | Driving Motor     | 110/220V 220W  | 110/220V 220W  |
| 機台尺寸   | Dimensions        | 895W x 570D x 730H mm(JN-740)<br>1515W x 570D x 480H mm(JN-740L)<br>1515W x 570D x 330H mm(JN-740SL) | 895W x 570D x 730H mm(JN-600)<br>1450W x 570D x 480H mm(JN-600L) |
| 淨重     | Net Weight        | 95kgs(JN-740) 80kgs(JN-740L) 70kgs(JN-740SL)   | 100kgs(JN-600) 95kgs(JN-600L)                                    |